




INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ



**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears a correction, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

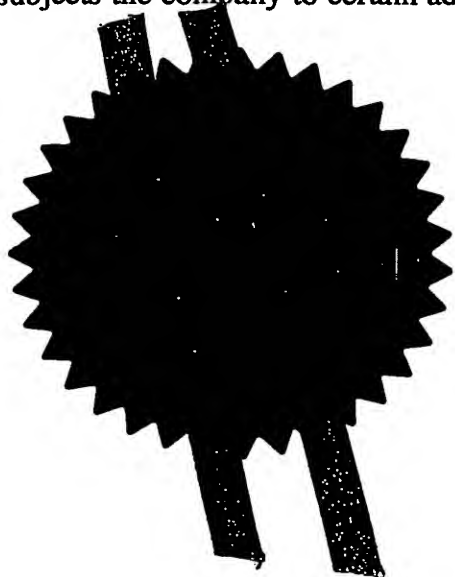

Signed


*H. Behan*

Dated

2 July 2004

**BEST AVAILABLE COPY**

Patents Form 1

Patents Act 1977  
(rule 16)

The  
**Patent  
Office**

24 JUN 03 2317214-2 002637  
001/7750 0 00-0314631.3

1/77

**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

P104790GB/JKH

2. Patent application number

(The Patent Office will fill in this part)

0314631.3

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Microsulis-plc Limited  
Microsulis House  
Parklands Business Park  
Denmead  
Hampshire  
PO7 6XPG  
F. 1177  
12.12.03

Patents ADP number (if you know it)

7610462002 6936439002

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

Radiation Applicator

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

WITHERS & ROGERS  
Goldings House  
2 Hays Lane  
London  
SE1 2HW

Patents ADP number (if you know it)

1776001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d))

YES

## Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

## Continuation sheets of this form

Description 6  
Claim(s) 2  
Abstract 1  
Drawing(s) 2

10. If you are also filing any of the following, state how many against each item.

## Priority documents

## Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) 1

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

*Withers & Rogers*

Date 23 June 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Jeff K Hogg

0117 925 3030

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least six weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500 505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

P104790GB

**RADIATION APPLICATOR****Technical Field**

This invention relates to radiation applicators and, in particular, to microwave medical treatment devices.

**Prior Art**

A known radiation applicator used for microwave medical treatment is shown in PCT/GB00/00682 and comprises a generator which supplies microwave energy via a coaxial conductor to a tip region at the distal end of the conductor. Dielectric packing is provided between the inner and outer conductors of the coaxial conductor but a length of the inner conductor at the tip projects beyond the outer conductor so as to form an antenna to emit radiation. The antenna is embedded axially in a cylindrical body of dielectric which has the same outer diameter as the coaxial conductor. A pointed tip at the end of the dielectric body serves to assist penetration into biological matter, such as a liver to perform ablation on a tumour.

**Disclosure of the Invention**

According to one aspect of the invention, a radiation applicator has a power input at one end, an elongate antenna extending axially at its distal end for emitting radiation into surrounding material, and a dielectric body which surrounds the antenna, characterised in that the dielectric body consists of multiple sections of different dielectric constant which are located axially relative to one another along the antenna.

The dielectric constant of each section of the dielectric body is selected so as to tune the applicator to operate at a particular frequency or range of frequencies for optimum performance in transferring energy to the surrounding material of predetermined dielectric constant. For example, energy transfer from the applicator to the surrounding material may change the physical properties of that material and the sectioned nature of the dielectric body may, in some embodiments, permit a broadband match of the applicator to the surrounding material so as to allow efficient energy transfer to the material to continue despite changes in the properties of the material.

Preferably, the dielectric body consists of three consecutive sections: a first section adjacent the power input, a second section adapted to be the major emitter of radiation, and a third tip section. The second section has a higher dielectric constant than the first section. The higher dielectric constant of the second section allows the overall length of the dielectric body to be made shorter than would otherwise be required if the dielectric body was composed entirely of the material of the first dielectric, the length being related to the wavelength of the radiation in the dielectric. The third, tip section, is composed entirely of a material with a different dielectric value from the other two sections and is chosen as a match to the surrounding material. The use of multiple sections of different dielectric constant allows the reflections from the dielectric interfaces to be used for matching or tuning at the power input to ensure optimum power transfer.

Preferably, the dielectric body has a tip section furthest from the power input which is pointed so as to penetrate the surrounding material in use. The fact that the tip is composed of a dielectric material and not an electrical conductor serves to avoid local surface heating. Preferably, the dielectric constant of the tip is less than that of the second section, and is preferably intermediate that of the first and second sections.

The multiple sections could be made as an integral body, or made as separate components assembled together to abut against one another end-to-end.

According to a further feature of the invention, a radiation reflector is provided at the interface between the sections of the dielectric body so as to modulate the transmission of radiation and further tune the applicator. Preferably, a radiation reflector is provided each side of the section which is intended to emit radiation into the surrounding material, a reflector on that side further from the input end having a larger area so as to reflect more energy than the reflector nearer the input end, thereby reducing transmission of radiation to the tip of the applicator. The emission of radiation from the dielectric body can therefore be more localised in one section. Preferably, the invention is designed to radiate more energy from the second section.

According to a second aspect of the invention, a radiation applicator has a power input at one end, an elongate antenna extending axially at its distal end for emitting radiation into surrounding material, and a dielectric body which surrounds the antenna, characterised in that one or more radiation reflectors are located axially along the antenna within the dielectric body to modulate the transmission of radiation.

Preferably, two radiation reflectors are spaced apart with the intermediate section of the dielectric body being intended to emit radiation into the surrounding material, the reflector on one side further from the input having a larger area so as to reflect more radiation than the reflector nearer the input end, thereby reducing transmission of radiation to the tip of the applicator.

Preferably, the reflectors, as used in connection with either the first or second aspect of the invention, are located at the interface between separate abutting sections of the dielectric body and help give structural support to the applicator. For example, the reflectors can be soldered or otherwise bonded to sections of the dielectric body and antenna.

#### Description of the Drawings

The invention will now be described by way of example with reference to the accompanying drawings in which:

Figure 1 shows an axially section through the tip of the radiation applicator according to the invention, and

Figure 2 shows a graph of reflected radiation at the input of the radiation applicator of Figure 1 against the input frequency.

#### Embodiments of the Invention

The radiation applicator illustrated in Figure 1 comprises a coaxial conductor 1, which may be rigid or flexible, and which is connected to a microwave power supply at one end (not shown) and terminates at its other end in a radiation emitting tip 2. The tip 2 consists of a cylindrical dielectric body composed of three sections 3,4,5, coaxially aligned and abutting

one another at interfaces between them so as to form a continuous body. One outer section 3 is connected to the end of the coaxial conductor 1. A portion 6 of the section 3 at one end is of reduced diameter and is inserted a short distance into the outer conductor 7 of the coaxial conductor to make a secure connection. The central conductor 8 of the coaxial conductor extends through an axial hole 9 in the body 2, through all three sections but terminating within the outer third section 5. During assembly, a metal washer 10 is soldered to the section 3 at the interface with section 4, and is soldered to the central conductor 8; and a second metal washer 11 is soldered to the middle section 4 at the interface with the third section 5, and is soldered to the central conductor 8. The washers 10 and 11 therefore serve to secure the two sections 3 and 4 of the dielectric body to the end of the coaxial conductor 1 via the central conductor 8. The third section 5 is then bonded to the second washer 11 and central conductor 8.

The third section 5 of the applicator has a pointed shape to assist insertion into material to be treated, and this will be made as sharp as is necessary for the application, for example, the treatment of liver cancer.

In operation, that portion of the central conductor 8 that extends from the outer conductor 7, acts as an antenna to emit radiation. The wavelength of the radiation within the dielectric body is determined by the frequency of the power supply and the dielectric constant of the various components. Thus the wavelength of the radiation is different in each of the three sections 3, 4 and 5. By appropriate selection of the dielectric constant of these three sections relative to one another and to the surrounding material in which the applicator is to be used, it is possible to tune the applicator to give optimum performance.

Another factor which affects the tuning of the applicator is the metal gaskets 10 and 11 which act as radiation reflectors. Both gaskets serve to reflect radiation back to the input, and with appropriate matching at the input ensures a maximum transfer of energy to the tip 2. The gasket 11 has a larger surface area than the gasket 10 so as to reduce the amount of energy transmitted to the third section 5.

Other factors which affect tuning are the length of the central conductor 8 extending beyond the outer conductor 7, the diameter and axial length of the individual dielectric sections 3, 4 and 5, and the thickness and diameter of the washers 10,11.

It will be appreciated that the choice of dielectric materials and dimensions of the various components allows great flexibility in designing a radiation applicator to suit a wide range of applications and performance requirements, bearing in mind that the dielectric constant of the surrounding material when the device is in use, will effect performance.

For example, a radiation applicator designed for medical use has the dimensions shown in Figure 1 and the following further specifications: the washer 10 has an outer diameter of 1.9mm; the washer 11 has an outer diameter of 2.7mm; the central conductor 8 protrudes beyond the outer conductor by 8.5mm; and the dielectric sections 3, 4, 5 are composed, respectively, of alumina with dielectric constant 10, titanium oxide with dielectric constant 100 and a Ca-Ti-Nd-Al dielectric with dielectric constant 47. The applicator of this example is capable of operating well at frequencies in the vicinity of 3GHz. In particular, the applicator of this example is especially suited to operation at a frequency of 2.45GHz and a power of 50W.

The performance of the applicator of the above example is illustrated in Figure 2. This shows the power reflected from the tip of the applicator against the operating frequency, and shows that there is a dip in the reflected power at about 2.45GHz, which corresponds to a maximum transfer of energy to the tip at this frequency. The width of the dip in Figure 2, which is about 0.6GHz, gives the applicator a broadband characteristic which allows it to better accommodate use with surrounding materials with a range of dielectric constant values.

In alternative embodiments of the invention, other dielectric materials may be used, including air, and instead of three dielectric sections there may be just two or may be four or more. Grooves may be formed in the outer surface of each or any of dielectric section circumferentially. Also, the dielectric sections may be tapered longitudinally.



6

Also, an imaging process could be used to guide the applicator to the desired location. The applicator may be of small enough diameter to be inserted through a guidewire, such as used in ultrasound imaging techniques, so as to ensure accurate treatment in use.

CLAIMS

1. A radiation applicator has a power input at one end, an elongate antenna extending axially at its distal end for emitting radiation into surrounding material, and a dielectric body which surrounds the antenna, characterised in that the dielectric body consists of multiple sections of different dielectric constant which are located axially relative to one another along the antenna.
2. An applicator as claimed in claim 1 in which, the dielectric body consists of a second section adapted to emit radiation, and a first section between the second section and the power input, and having a lower dielectric constant than the first section.
3. An applicator as claimed in claim 2 in which the dielectric body has an outer section furthest from the power input having a dielectric constant lower than that of the second section.
4. An applicator as claimed in claim 3 in which the outer section has a dielectric constant intermediate that of the first and second sections.
5. An applicator as claimed in any of claims 1 to 4 in which, the multiple sections are made as separate components and are assembled to abut against one another end-to-end.
6. An applicator as claimed in any of claims 1 to 5 in which, a radiation reflector is provided at the interface between two sections of the dielectric body so as to modulate the transmission of radiation and tune the applicator.
7. An applicator as claimed in claim 6 in which, a radiation reflector is provided each side of a section which is intended to emit radiation into the surrounding material, a reflector on that side further from the input end having a larger area so as to reflect more energy than the reflector nearer the input end, thereby reducing transmission of radiation to the tip of the applicator.

8. A radiation applicator having a power input at one end, an elongate antenna extending axially at its distal end for emitting radiation into surrounding material, and a dielectric body which surrounds the antenna, characterised in that one or more radiation reflectors are located axially along the antenna within the dielectric body to modulate the transmission of radiation.

9. An applicator as claimed in claim 8 in which, two radiation reflectors are spaced apart with the intermediate section of the dielectric body intended to emit radiation into the surrounding material, the reflector on one side further from the input having a larger area so as to reflect more radiation than the reflector nearer the input end, thereby reducing transmission of radiation to the tip of the applicator.

10. An applicator as claimed in any one of claims 6 to 9 in which, each reflector is located at the interface between separate sections of the dielectric body and gives structural support to the applicator.

11. An applicator as claimed in any one of the preceding claims in which the outer end of the dielectric body furthest from the power input is pointed.

12. An applicator as claimed in any one of the preceding claims in which the power input comprises a coaxial conductor in which the central conductor extends from the outer conductor to form said elongate antenna.

13. An applicator as claimed in claim 12 in which the dielectric body has a reduced diameter and which is inserted into the open end of the outer conductor.


14. A radiation applicator substantially as herein described with reference to the accompanying drawings.

9

**ABSTRACT****RADIATION APPLICATOR**


A radiation applicator with a dielectric body 2 surrounding the antenna. The dielectric body 2 is comprised of three sections 3, 4 and 5 with different dielectric constants to provide broad-band matching of the applicator to surrounding material. Washers 10 and 11 are mounted on the antenna to act as reflectors.

(Figure 1)

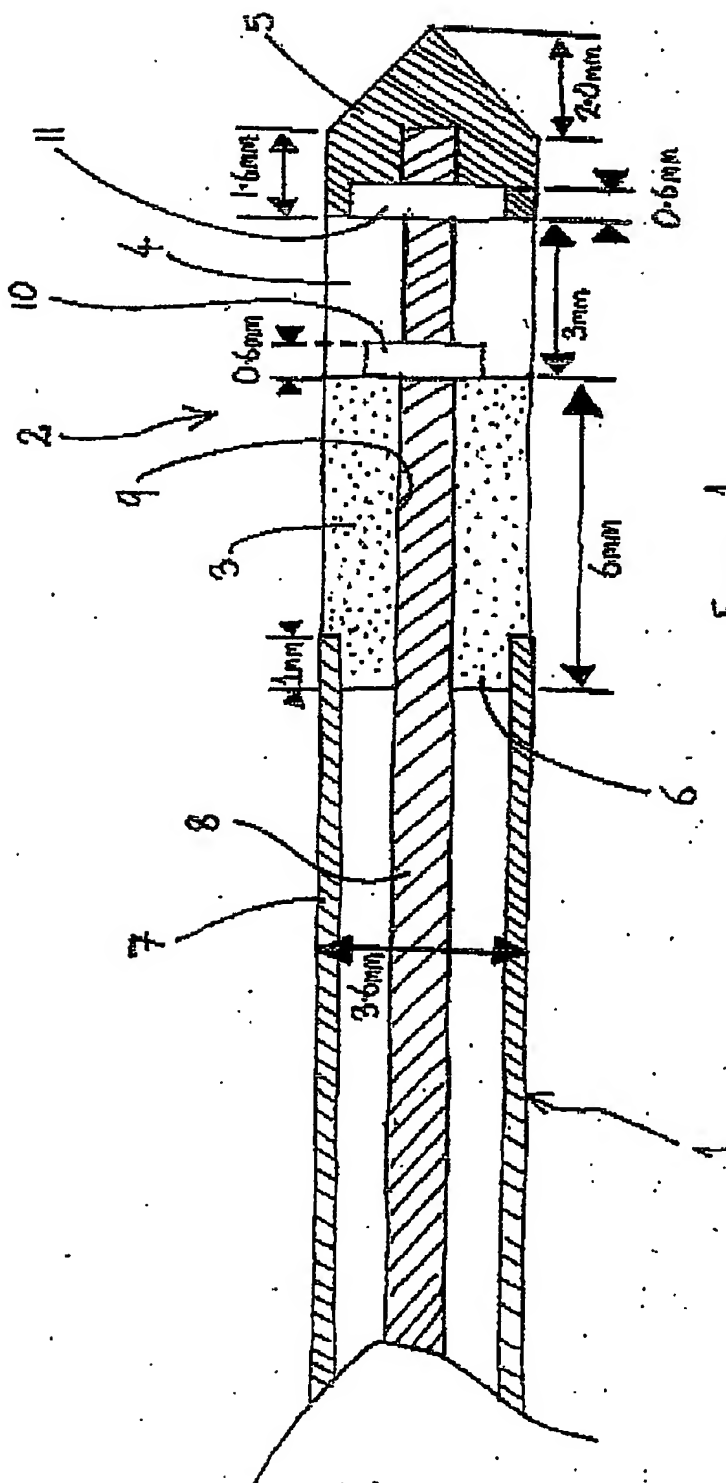$i/2$ 

2/2

3.5mm Percutaneous 1 |S11|

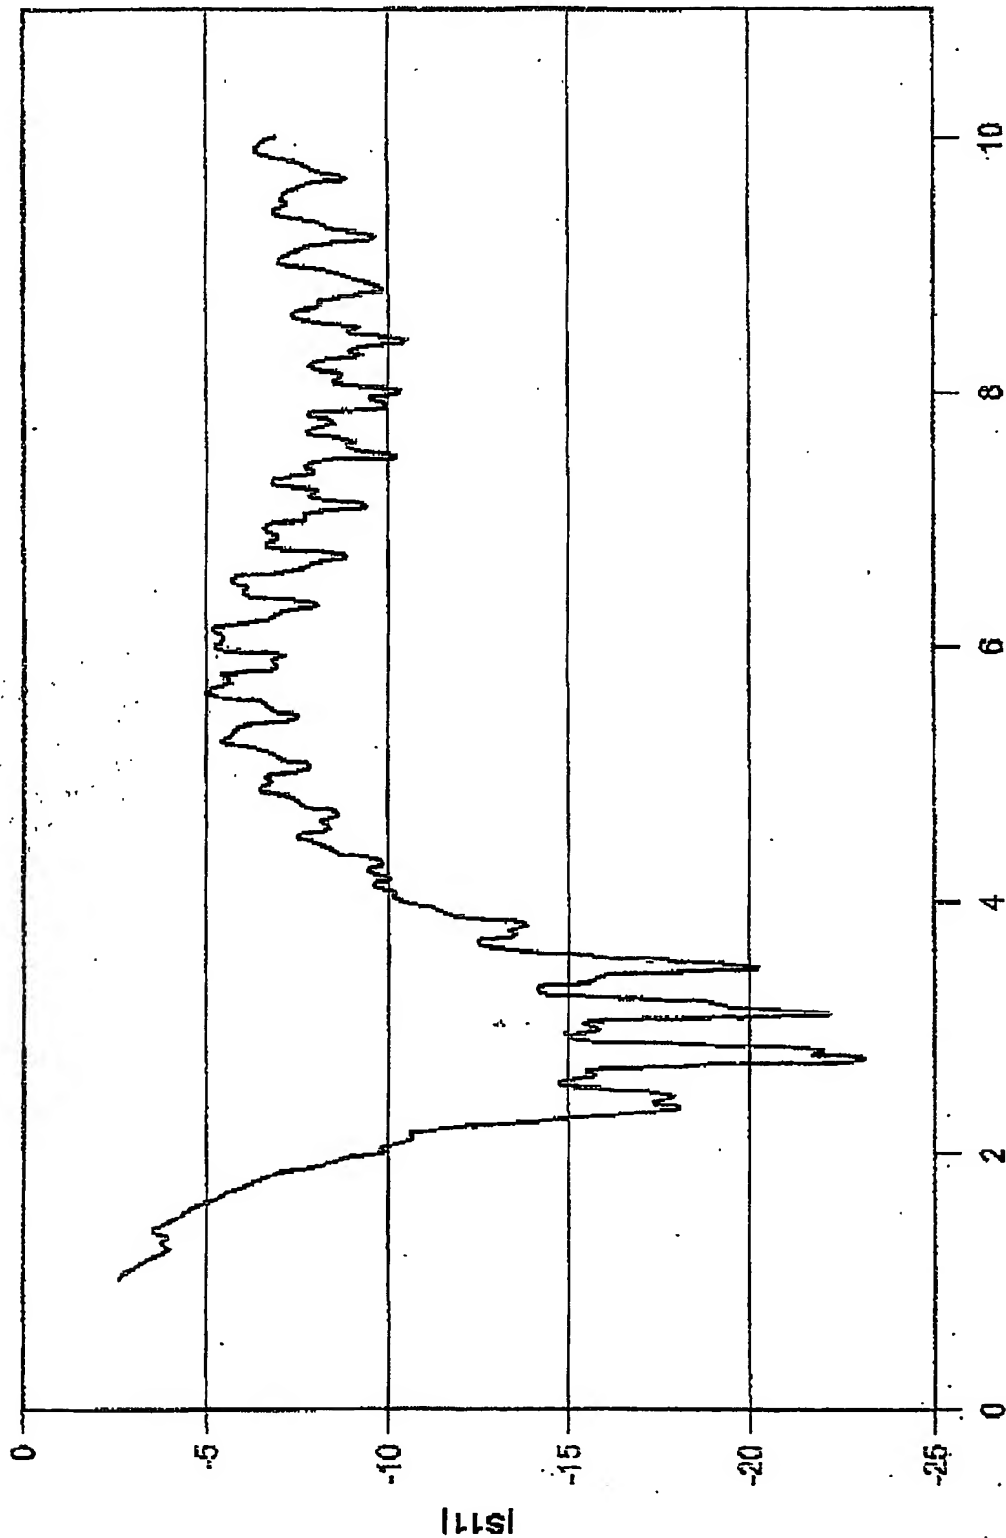

Frequency (GHz)

Figure 2

THE PATENT OFFICE  
02 JUL 2004  
Received in Patents  
International Unit

THE PATENT OFFICE  
02 JUL 2004  
Received in Patents  
International Unit

PCT/GB2004/002620



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☒ FADED TEXT OR DRAWING

☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☒ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**